


# NEWLIFESCREEN ALU

- PVC-free, sustainable screen fabric made from 100 % recycled PET bottles
- Aluminium backing for superior solar reflection values
- Cradle to Cradle Certified™ Bronze
- Standard 100 by Oeko-Tex® certified, free from harmful substances

## APPLICATIONS

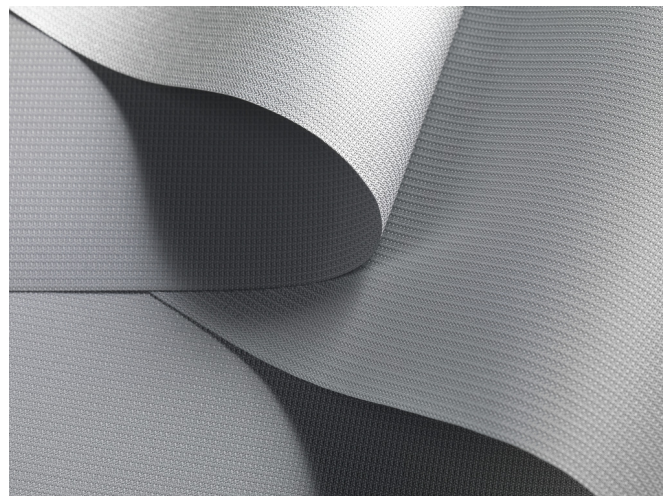

## FABRIC PROPERTIES

|                                                                                     |                                          |
|-------------------------------------------------------------------------------------|------------------------------------------|
|    | Semi transparent                         |
|    | 100% recycl. polyester, aluminium backed |
|   | 215 g/m <sup>2</sup>                     |
|  | 0.55 mm                                  |
|   | 235 cm                                   |
|  | 240 cm                                   |

## FEATURES / TECHNICAL PROPERTIES

|                                                                                     |                            |
|-------------------------------------------------------------------------------------|----------------------------|
|    | 7                          |
|    | Flame retardant            |
|   | Optimised for workstations |
|  | Low heat transmittance     |
|  | Digital printing           |
|  | Oeko-Tex, Cradle to Cradle |
|  | Special colours from 400 m |

## WASHING INSTRUCTIONS



## FLAME RETARDANT

Class 1 (UNI 8456)  
B1 (DIN 4102-1)  
M1 (NF P 92-503/5/7)  
Type B (BS 5867-2)



## Newlifescreeen Alu

### OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)

| Colour     | $T_V$ | $T_S$ | $R_S$ | $A_S$ | $T_{UV}$ | $F_C$ | $g_{tot}$ |
|------------|-------|-------|-------|-------|----------|-------|-----------|
| <b>101</b> | 9.6   | 9.7   | 59.2  | 31.1  | 10.8     | 0.55  | 0.39      |
| <b>104</b> | 4.1   | 7.0   | 56.9  | 36.1  | 4.0      | 0.56  | 0.40      |
| <b>105</b> | 2.9   | 5.9   | 57.7  | 36.4  | 2.9      | 0.55  | 0.40      |
| <b>108</b> | 2.4   | 5.5   | 59.7  | 34.8  | 2.5      | 0.54  | 0.39      |

$T_V$  Visible light transmission

$R_S$  Solar reflectance

$T_{UV}$  UV transmission


$g_{tot}$  Total g-value

$T_S$  Solar transmission


$A_S$  Solar absorption

$F_C$  Shading factor


$F_C + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1




101



104



105



108

Colours shown are not binding