

NOX

- Polyester blackout fabric with a colour matched reverse for a uniform appearance inside and out
- Standard 100 by Oeko-Tex® certified, free from harmful substances

APPLICATIONS



Width < 260 cm:
Dim-out blinds
Not suitable: SG
4905

FABRIC PROPERTIES

●	Blackout
⌘	Polyester acrylic-coated
kg	340 g/m ²
+	0.44 mm
← max. →	295 cm
⌘	300 cm

WASHING INSTRUCTIONS




FEATURES / TECHNICAL PROPERTIES

☀	5-6
🔥	Flame retardant
🖨	Digital printing
🌿	Oeko-Tex
🎨	Special colours from 1'000 m

FLAME RETARDANT

B1 (DIN 4102-1)
Type B (BS 5867-2)
B-s2,d0 (EN 13501-1)

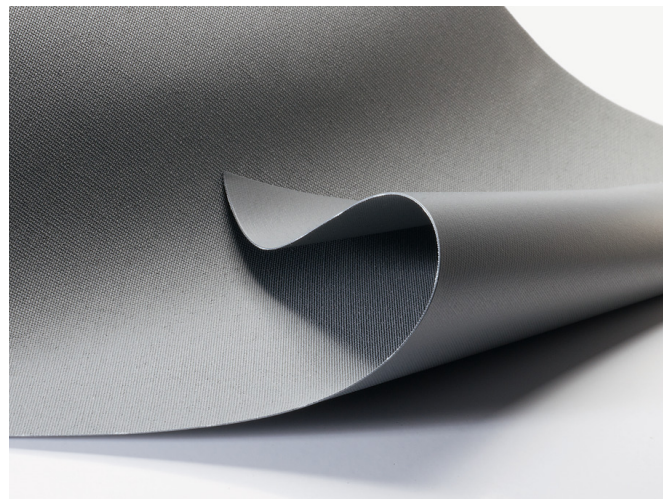

Nox

OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	R_s	A_s	F_c	g_{tot}
1	72.0	28.0	0.46	0.33
2	70.0	30.0	0.47	0.34
3	49.0	51.0	0.61	0.44
4	44.0	56.0	0.64	0.46
5	17.0	83.0	0.81	0.58
6	5.0	95.0	0.89	0.64

R_s Solar reflectance


A_s Solar absorption

F_c Shading factor

g_{tot} Total g-value

$F_c + g_{tot}$: Value calculated with glass: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Nox



1




2




3



4



5



6

Colours shown are not binding