
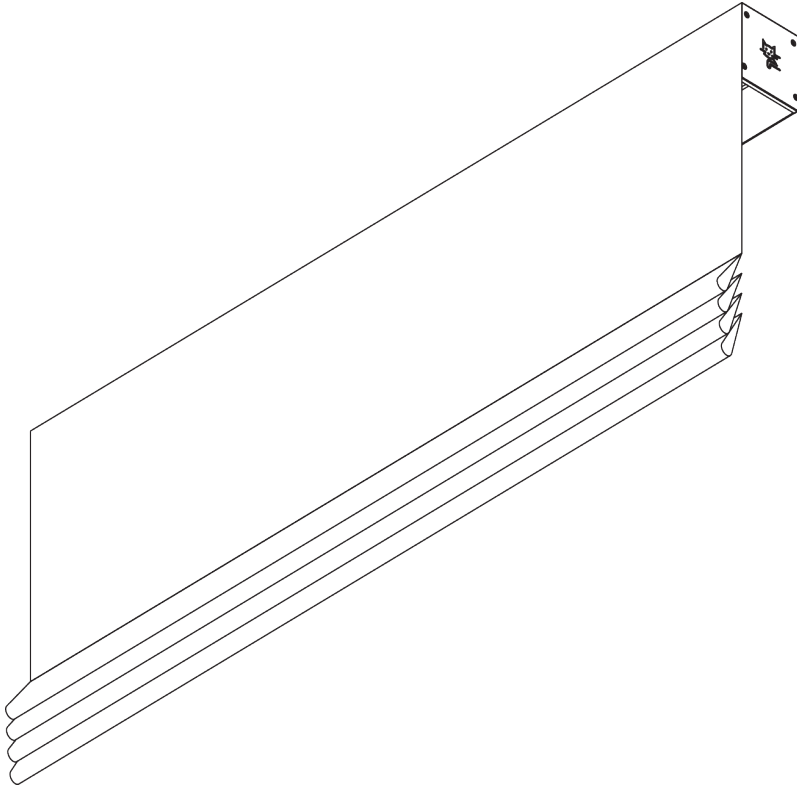


# SG 2360

---



## PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016, black 9005
- **Fabrics:** refer to Silent Gliss fabric collection

### **Features:**

- Quiet motors
- Soft stop
- Various control options
- Enclosed headrail
- Fascia included

# SYSTEM SPECIFICATIONS


## A. SYSTEM DIMENSIONS



4 m



60 cm\*  
\*see motor specification  
table



4 m




16 m<sup>2</sup>




10 kg

## B. PROFILE


### Profile information




**SG 2371**  
Head box




**SG 2372**  
Tube ø 45 mm



**SG 11434**  
Box cover




**SG 2004**  
Bottom bar 20x7 mm




**SG 2006**  
Bottom bar 28x3 mm



**SG 2135**  
Rod steel ø 3 mm




**SG 2137**  
Rod fiberglass ø 4 mm



**SG 2144**  
Profile ø 8 mm

C. HOW TO  
MEASURE

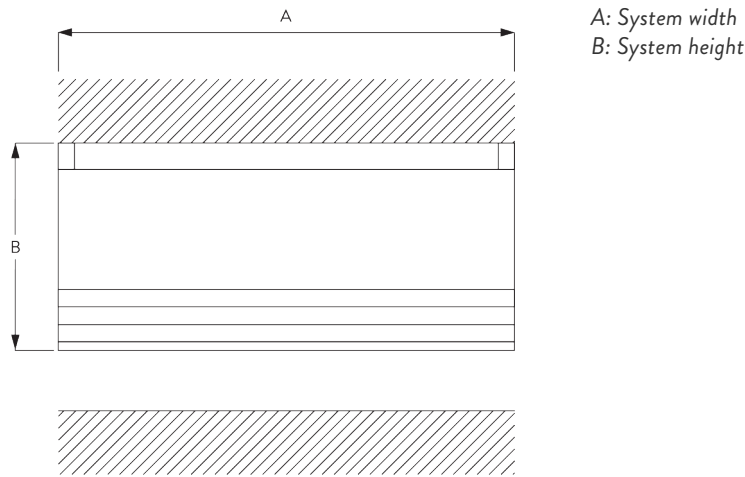


FITTING

A. FITTING  
INFORMATION



For detailed fitting information, visit the *Silent Gliss* website.

Fixing points




B. CEILING FITTING

Clamp SG 3003

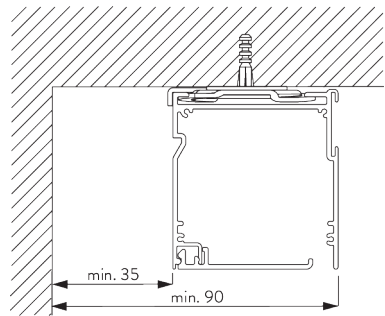

**SG 3003**  
Clamp


Bracket SG 2521

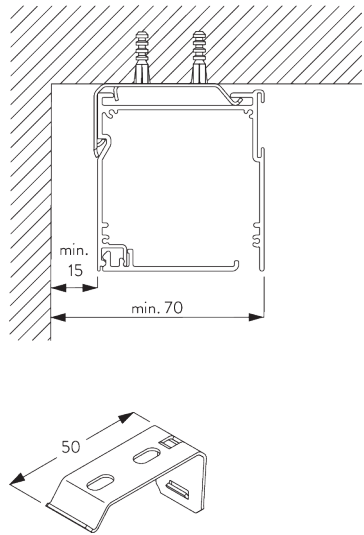


SG 2521  
Bracket

C. WALL FITTING


Smart Fix

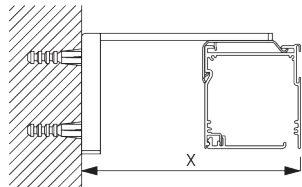


**Smart Fix SG 11200 - SG 11204 and bracket SG 2521:**  
Screw SG 10395 (M4x6) needed.



**Square Smart Fix SG 11210 - SG 11214 and bracket SG 2521:**  
Screw SG 10395 (M4x6) needed.

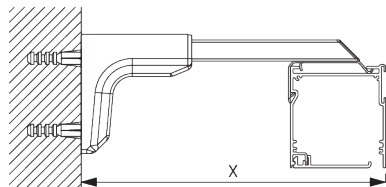

**Universal Smart Fix SG 11154 - SG 11156 and bracket SG 2521:**  
Screw SG 10492 (M4x8) needed.




SG 2521  
Bracket




SG 10395  
Pan head screw M4x6




SG 10492  
Pan head screw M4x8




SG 11200  
Smart Fix 60 mm




**SG 11201**  
Smart Fix 80 mm




**SG 11202**  
Smart Fix 100 mm




**SG 11203**  
Smart Fix 120 mm




**SG 11204**  
Smart Fix 150 mm




**SG 11210**  
Square Smart Fix 60 mm




**SG 11211**  
Square Smart Fix 80 mm




**SG 11212**  
Square Smart Fix 100 mm




**SG 11213**  
Square Smart Fix 120 mm




**SG 11214**  
Square Smart Fix 150 mm



**SG 11154**  
Universal Smart Fix 120 mm





**SG 11155**  
Universal Smart Fix 150 mm






**SG 11156**  
Universal Smart Fix 200 mm

## Bracket SG 2363




**SG 2363**  
Bracket 68 mm

## D. FITTING WITH SIDE GUIDE OPTION




**SG 2384**




**SG 8235**

Side guide wire base short




**SG 8236**

Side guide wire base long




**SG 8237**

Side guide wire holder



**SG 8249**

Side guide device




**SG 10643**

Side guide wire  $\varnothing$  1.3 mm x 4.2 m

# SYSTEM OPTIONS

## A. FABRIC MAKE-UP

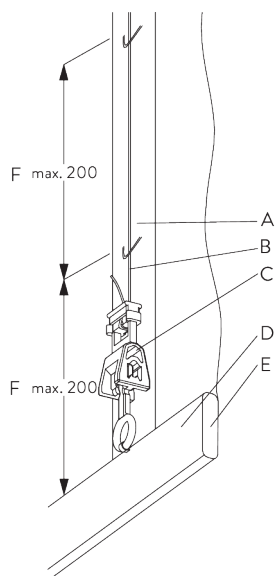

### Type A (standard)

A: Loop tape SG 3074


B: Cord SG 2216

C: Child safety hook set SG 3164

D: Hollow hem

E: Bottom bar SG 2004

F: Child safety: max. distance 200 mm

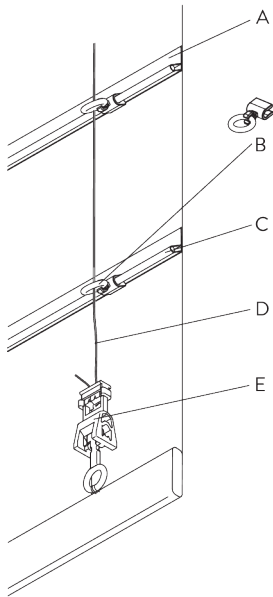

### **Type B (rod)**


A: Hollow hem

B: Child safety eyelet hard fold SG 3069

C: Rod SG 2135

D: Cord SG 2216

E: Child safety hook set SG 3164

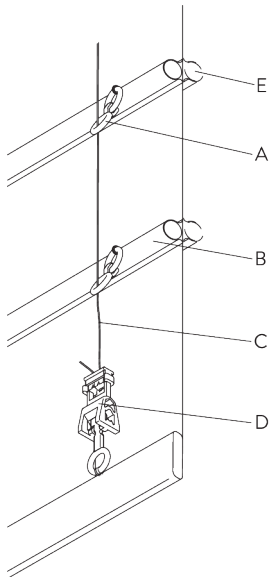

### **Type C (rod)**

A: Child safety eyelet set SG 3161


B: Rod SG 2135 / SG 2137

C: Cord SG 2216

D: Child safety hook set SG 3164

E: Option: Rod SG 2135 / SG 2137 can be installed to room side

## B. SIDE GUIDES

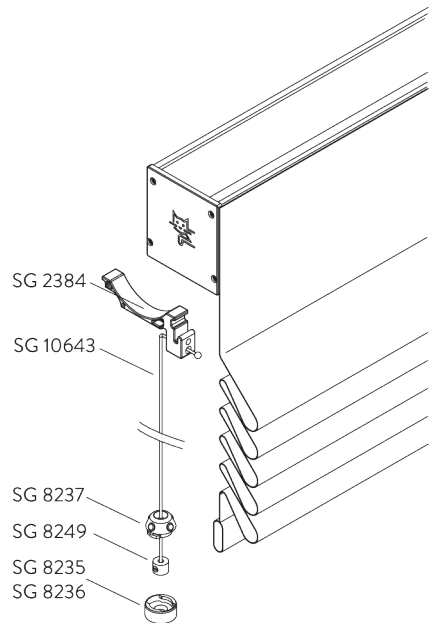

### Additional parts:

- 2x SG 2384 Side guide wire holder
- 2x SG 8235 / SG 8236 Side guide wire base short / long
- 2x SG 8237 Side guide wire holder
- 2x SG 8249 Side guide device
- 2x SG 10643 Side guide wire  $\varnothing$  1.3 mm

### Note:

- Up to 15° from vertical

# MOTORS & CONTROLS

## A. MOTOR FEATURES

| Motors | 50-Series | 40-Series            | 25-Series | 20-Series | 5-Series |
|--------|-----------|----------------------|-----------|-----------|----------|
|        | SG 11251  | SG 11943<br>SG 11944 | SG 11625  | SG 10522  | SG 10715 |

| Motor Features                                       |       |       |       |       |       |
|------------------------------------------------------|-------|-------|-------|-------|-------|
| Soft stop                                            | •     | •     | •     | •     |       |
| Electronic end-stop                                  | •     | •     | •     | •     |       |
| Electronic revolution counter (unlimited revolution) | •     | •     | •     | •     |       |
| Mechanical end-stop                                  |       |       |       |       | •     |
| Mechanical revolution counter (limited revolution)   |       |       |       |       | •     |
| One intermediate position possible                   |       | •     |       |       |       |
| Bottom bar alignment                                 | •     | •     |       |       |       |
| Noiseless stop                                       |       |       |       | •     |       |
| Parallel wiring possible without additional relays   |       | •     | •     | •     |       |
| Disconnectable motor cable                           | •     | •     | •     | •     |       |
| IP class                                             | IP 30 | IP 30 | IP 30 | IP 44 | IP 44 |

| Control Features                                                          |   |   |   |   |   |
|---------------------------------------------------------------------------|---|---|---|---|---|
| Mains power control                                                       |   |   | • | • | • |
| Dry contact control                                                       | • | • |   |   |   |
| Dry contact and / or SG Control N control                                 |   | • |   |   |   |
| SG Control N (built-in receiver)                                          |   | • |   |   |   |
| Smart by Silent Gliss                                                     | • |   |   |   |   |
| Suitable for most major home automation systems (with suitable interface) |   | • | • | • | • |

B. MOTOR

SPECIFICATIONS

| Motors                               | Max. weight | Min. system width | Voltage      | Current | Frequency | Speed  | Frequency receiver |
|--------------------------------------|-------------|-------------------|--------------|---------|-----------|--------|--------------------|
| 50-Series<br>(Smart by Silent Gliss) |             |                   |              |         |           |        |                    |
| SG 11251                             | 10 kg       | 60 cm             | 24 V DC      | 1.5 A   | n/a       | 32 rpm | n/a                |
| 40-Series                            |             |                   |              |         |           |        |                    |
| SG 11943                             | 10 kg       | 83 cm             | 100-240 V AC | 0.6 A   | 50-60 Hz  | 32 rpm | 433 MHz            |
| SG 11944                             | 10 kg       | 60 cm             | 24 V DC      | 1.5 A   | n/a       | 32 rpm | 433 MHz            |
| 25-Series                            |             |                   |              |         |           |        |                    |
| SG 11625                             | 10 kg       | 87 cm             | 100-240 V AC | 0.8 A   | 50-60 Hz  | 32rpm  | n/a                |
| 20-Series                            |             |                   |              |         |           |        |                    |
| SG 10522 (standard)                  | 10 kg       | 60 cm             | 230 V AC     | 0.6 A   | 50 Hz     | 30 rpm | n/a                |
| 5-Series                             |             |                   |              |         |           |        |                    |
| SG 10715                             | 10 kg       | 60 cm             | 230 V AC     | 0.5 A   | 50 Hz     | 28 rpm | n/a                |

C. OPERATING

METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major building management systems.

D. WIRING








DIAGRAMS







Refer to Silent Gliss website.









# PARTS




















## A. STANDARD PARTS


|                                                                                     |                                         |
|-------------------------------------------------------------------------------------|-----------------------------------------|
|    | <b>SG 2004</b><br>Bottom bar 20x7 mm    |
|    | <b>SG 2216</b><br>Cord ø 0.85 mm        |
|    | <b>SG 2221</b><br>Velcro tape           |
|    | <b>SG 2371</b><br>Head box              |
|    | <b>SG 2372</b><br>Tube ø 45 mm          |
|   | <b>SG 2373</b><br>End cover             |
|  | <b>SG 2374</b><br>End cover             |
|  | <b>SG 2375</b><br>Tube adapter ø 43 mm  |
|  | <b>SG 2376</b><br>Shell                 |
|  | <b>SG 2377</b><br>Pin                   |
|  | <b>SG 2381</b><br>Motor plate           |
|  | <b>SG 2539</b><br>Tape                  |
|  | <b>SG 3003</b><br>Clamp                 |
|  | <b>SG 3164</b><br>Child safety hook set |

|                                                                                     |                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------|
|    | <b>SG 9917</b><br>Hirschmann portable socket-outlet STAK 3 N |
|    | <b>SG 10284</b><br>O-Ring                                    |
|    | <b>SG 10522</b><br>Motor 230V AC, 20-Series S 3/30           |
|    | <b>SG 10621</b><br>Tube adapter                              |
|    | <b>SG 11185</b><br>Pan head screw 2.2x9.5 DIN 7981 C         |
|   | <b>SG 11324</b><br>PT Screw Countersunk KA35x14              |
|  | <b>SG 11354</b><br>Motor drive 10/20-Series                  |
|  | <b>SG 11434</b><br>Box cover                                 |

## B. OPTIONAL PARTS

|                                                                                       |                                         |
|---------------------------------------------------------------------------------------|-----------------------------------------|
|    | <b>SG 2006</b><br>Bottom bar 28x3 mm    |
|    | <b>SG 2093</b><br>Ring                  |
|    | <b>SG 2135</b><br>Rod steel ø 3 mm      |
|    | <b>SG 2137</b><br>Rod fiberglass ø 4 mm |
|    | <b>SG 2144</b><br>Profile ø 8 mm        |
|   | <b>SG 2164</b><br>Ring tape             |
|  | <b>SG 2363</b><br>Bracket 68 mm         |
|  | <b>SG 2378</b><br>Support               |
|  | <b>SG 2379</b><br>Sleeve                |
|  | <b>SG 2384</b>                          |
|  | <b>SG 2521</b><br>Bracket               |
|  | <b>SG 3055</b><br>Hook                  |
|  | <b>SG 3069</b><br>Child safety eyelet   |
|  | <b>SG 3074</b><br>Loop tape             |

|                                                                                    |                                              |                                                                                     |                                                           |                                                                                       |                                                        |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------|
|    | <b>SG 3161</b><br>Child safety eyelet set    |    | <b>SG 10643</b><br>Side guide wire ø 1.3 mm x 4.2 m       |    | <b>SG 11214</b><br>Square Smart Fix 150 mm             |
|    | <b>SG 3165</b><br>Child safety eyelet set    |    | <b>SG 10715</b><br>Tubular motor 230V AC, 5 Series S 6/28 |    | <b>SG 11251</b><br>Motor 24V DC, 50-Series S 3/32      |
|    | <b>SG 3166</b><br>Child safety tape set      |    | <b>SG 11154</b><br>Universal Smart Fix 120 mm             |    | <b>SG 11260</b><br>Gateway Cedia                       |
|    | <b>SG 8235</b><br>Side guide wire base short |    | <b>SG 11155</b><br>Universal Smart Fix 150 mm             |    | <b>SG 11261</b><br>Gateway KNX                         |
|    | <b>SG 8236</b><br>Side guide wire base long  |    | <b>SG 11156</b><br>Universal Smart Fix 200 mm             |    | <b>SG 11262</b><br>Expansion unit                      |
|   | <b>SG 8237</b><br>Side guide wire holder     |   | <b>SG 11200</b><br>Smart Fix 60 mm                        |   | <b>SG 11263</b><br>Power supply 24V DC, 2.5A DIN Rail  |
|  | <b>SG 8249</b><br>Side guide device          |  | <b>SG 11201</b><br>Smart Fix 80 mm                        |  | <b>SG 11264</b><br>Power supply 24V DC, 3.8A DIN Rail  |
|  | <b>SG 8943</b><br>Cable grommet              |  | <b>SG 11202</b><br>Smart Fix 100 mm                       |  | <b>SG 11265</b><br>Power supply 24V DC, 5A DIN Rail    |
|  | <b>SG 9916</b><br>Hirschmann plug set        |  | <b>SG 11203</b><br>Smart Fix 120 mm                       |  | <b>SG 11266</b><br>Power supply 24V DC, 10A DIN Rail   |
|  | <b>SG 9959</b><br>Central control unit relay |  | <b>SG 11204</b><br>Smart Fix 150 mm                       |  | <b>SG 11355</b><br>Motor drive 5-Series                |
|  | <b>SG 10149</b><br>Pan head screw 2.2x6.5    |  | <b>SG 11210</b><br>Square Smart Fix 60 mm                 |  | <b>SG 11356</b><br>Motor drive 40/50-Series            |
|  | <b>SG 10293</b><br>Cable 230V AC, 2/3/5/10 m |  | <b>SG 11211</b><br>Square Smart Fix 80 mm                 |  | <b>SG 11482</b><br>Ring                                |
|  | <b>SG 10395</b><br>Pan head screw M4x6       |  | <b>SG 11212</b><br>Square Smart Fix 100 mm                |  | <b>SG 11625</b><br>Motor 100-240V AC, 25-Series S 3/32 |
|  | <b>SG 10492</b><br>Pan head screw M4x8       |  | <b>SG 11213</b><br>Square Smart Fix 120 mm                |  | <b>SG 11900</b><br>Move Server                         |




---

**SG 11931**

*Radio hand held 1 channel*

---



---

**SG 11932**

*Radio hand held 6 channel*

---



---

**SG 11936**

*Radio wall transmitter 1 channel*

---



---

**SG 11937**

*Radio wall transmitter 6 channel*

---



---

**SG 11943**

*Motor 100-240V AC, 40-Series S 3/32, radio receiver*

---




---

**SG 11944**

*Motor 24V DC, 40-Series S 3/32, radio receiver*

---



---

**SG 11965**

*Power supply set 24V/2A with EU/CH plug*

---